


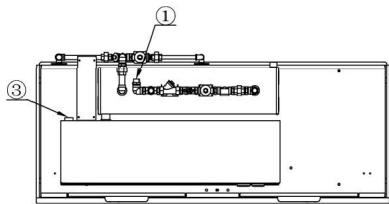


可選配置 Optional Configuration

電源要求	Power Requirements	380V/50HZ/3P	380V/50HZ/3P
加熱方式	Heating	電 Electricity	蒸汽 Steam
進水溫度 (°C)	Incoming Water temperature (°C)	10—60	10—60
水槽加熱功率 (千瓦)	Tank heater (KW)	7.5x2	-
漂洗加熱功率 (千瓦)	Booster heater (KW)	18x2	-
蒸汽總耗量 (公斤/小時)	Total steam consumption (Kg/h)	-	88
清洗水泵功率 (千瓦)	Wash pump (KW)	1.5x2	1.5x2
傳動馬達功率 (千瓦)	Drive motor (Kw)	0.2	0.2
總功率 (千瓦)	Total connected load (KW)	55	4
總電流 (安培)	Total amps required (A)	84	6
電源線截面 (mm ²)	Cross section of cable (mm ²)	25	2.5
空氣開關額定電流 (安培)	Rated current of circuit breaker (A)	100	16

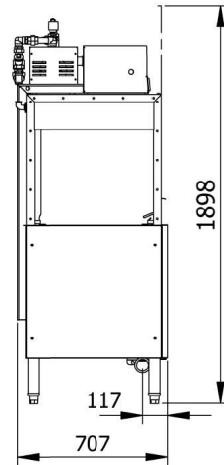

- (1) 進水管連接 Water In
- (2) 排水連接 Drain Out
- (3) 電源連接 Cable Connection

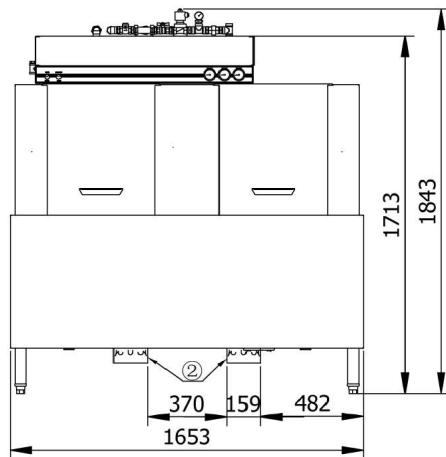

特點及優勢 Characteristics and Advantages:

- 不銹鋼清洗泵，經久耐用，功率強大，確保洗滌效果
- 所有配件都易於拆裝清洗，不需任何輔助工具
- 安全保護裝置，無人取碗時會自動停機，進一步降低運行成本
- 一體式上罩設計，防止水濺出並可在安裝過程中更改機器方向
- 多種適用範圍，熱水和冷水均可使用

- Long lasting operation as all components are made of stainless steel 304
- All internal components are easy to remove and clean
- Auto start/stop levers further reduce water and energy consumption
- Integrated splash hood avoids splash and makes it easy to switch direction during installation
- Various range suitable to both hot and cold main water supply temperature

